



jaga

NEW

TWINE & PINCH

A tribute to the traditional column radiator

Eyecatchers
* From design to art *
€ 2009 Ex

The information in this price list is correct at the time of printing. Jaga reserves the right to change product specification at any time in line with our policy of continuous improvement and innovation.

Prices valid from 1st December 2008.

All prices exclude VAT.

TWINE & PINCH

Twine & Pinch are inspired by the traditional column radiator. The tight heating element and the tough no-nonsense design bring authenticity in your interior.

4 TWINE PIANO



'CRANK UP THE HEAT'
composed by The Big Four quintet



5

TWINE PIANO

www.
THE RADIATOR FACTORY
.COM

FROM ZEBRA TO CHAMELEON

Dressed to impress: Twine & Pinch always appear in style. Would you like it in one colour? Or rather a piano keyboard in black and white? Or every tube different? Anything's possible, including a Create Your Own design that gives you the freedom to compose your own colour palette.

To make the picture complete, you can also chose the finish of the collectors itself. They are available in brushed aluminium or polished stainless steel. *Looks good.*





7

TWINE PIANO

The first 'limited edition'.

RINGS OF WARMTH

The new collector with injection rings invents the traditional member radiator again. Highly technological from the inside for a perfect flow, real jewels from the outside in brushed stainless steel or aluminium look.

What you do not see are the countless connection possibilities and the hidden air vent and drain cock. And wit model LR also an integrated valve so the thermostat goes seamlessly into the collector. A visible new design, an invisible micro cosmos of technique.





INGENUITY IN MOTION


Twine & Pinch can be reversed thanks to an ingenious suspension clip that turns on its own axis. It can be turned upside down, from left to right and back again so that you can connect it in any position you want.

The LR connection also has an invisible integrated valve, lockshields and a design thermostatic head in the same polished stainless steel or aluminium effect as your collector.


A close-up photograph of a radiator component, likely a thermostatic head or valve, showing a polished metallic finish. The component consists of a horizontal cylindrical body with three vertical bars extending downwards from its left side. The right end of the cylinder is perforated with a grid of small holes. The text "ALUMINIUM EFFECT" is printed on the right side of the cylinder.

ALUMINIUM EFFECT


Version LR

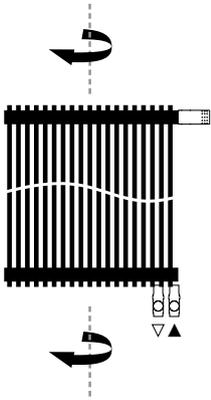

Version BT

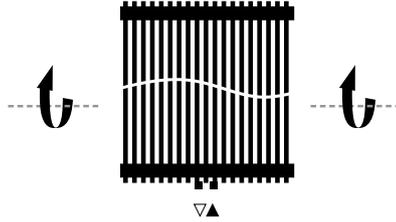

POLISHED STAINLESS STEEL

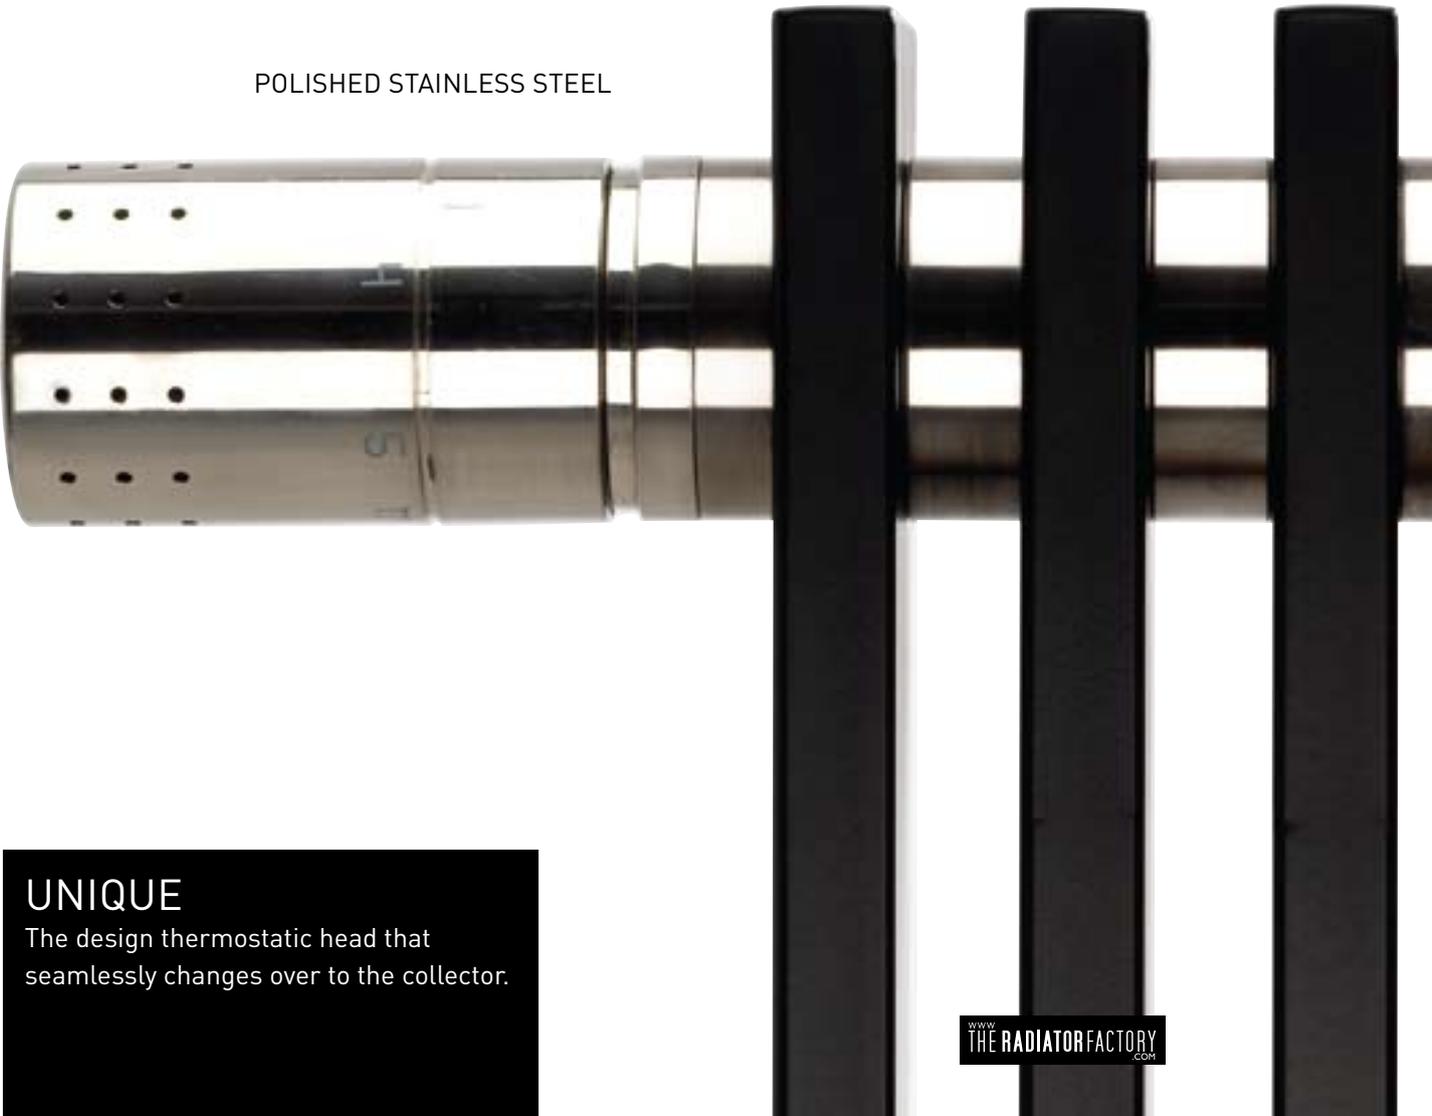

UNIQUE

The design thermostatic head that seamlessly changes over to the collector.



HIGHEST HEAT EMISSION

They look cool, but don't be mistaken: Twine & Pinch quickly warm up for you. What's more, they are truly powerful decorative radiators for low water temperature systems. The numbers tell the story: an EN442 capacity of 1000 watt/m² with regime 55/45!

55
45

55/45 is a typical low water temperature system that uses less energy. It is especially suitable for modern modulating condensing boilers and heat pumps. With usual water temperature 75/65 the delivery is almost doubled.



PERFECT VERTICAL POSITION


Stately high or a more traditional place under the window? No matter how high or wide or where it is placed, the streamlined vertical design will remain the same. In any room of your house. Twine & Pinch are available in heights of 50, 90, 180 and 200 centimetres.

THE DURABLE DUO

Twine & Pinch are here to stay. These are not one day wonders. All parts are recyclable and replaceable. Furthermore you can easily increase each Twine & Pinch with extra radiation tubes. They always fit perfectly in your interior. And these durable radiators become family friends for life.

PINCH

Streamlined curves.

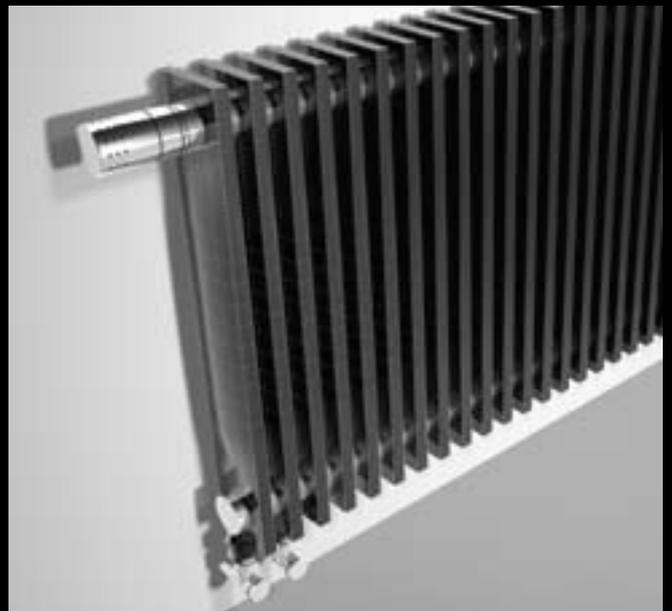

TWINE
Stylised cool.






TWINE

With option towel rail

TWINE TOWEL RAIL


TWINE TOWEL RAIL STAINLESS STEEL - EFFECT

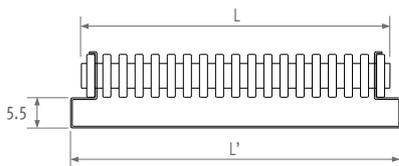

The Twine towel rail is easy to assemble between the radiation pipes and can be fitted at any height.

CODE	For Twine L	L'
9042.01379.012	L 33 - 45 - 57 - 63 - 69 - 81	37.9
9042.01501.012	L 45 - 57 - 63 - 69 - 81	50.1
9042.01622.012	L 57 - 63 - 69 - 81	62.2
9042.01683.012	L 63 - 69 - 81	68.3
9042.01743.012	L 69	74.3

TWINE TOWEL RAIL CHROME

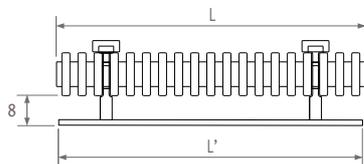

CODE	For Twine L	L'
9042.02560.009	L 45 - 57 - 63 - 69 - 81	56
9042.02660.009	L 57 - 63 - 69 - 81	66




Create your own: play with the towel rail and make your own combination.

TWINE BT

DIMENSIONS

TIW_Twine /BT

Dimensions in cm

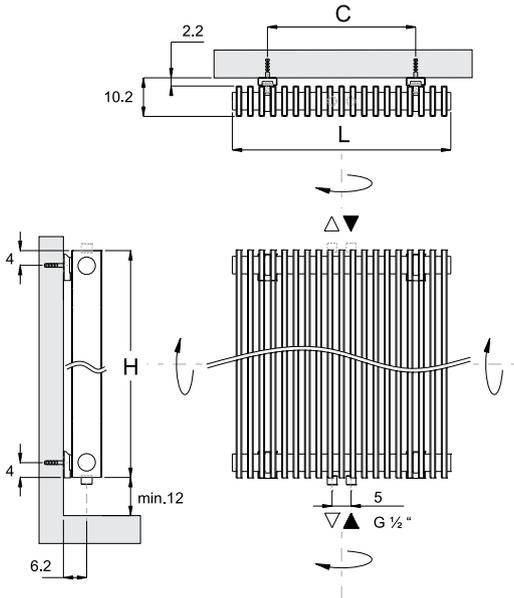


H	50/90		180/200	
L	C*	L	C*	
45.5	33	33.5	21	
63.5	51	45.5	33	
81.5	63	57.5	45	
99.5	81	69.5	51	
117.5	99	81.5	63	
135.5	117			

* C = -0 / +1

CONNECTION

Connection BT: central connection below or above.

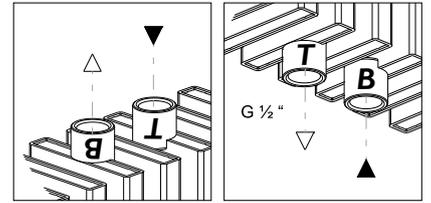

Caution:
 connection below: B = flow
 connection above: T = flow

Connection sets and sleeve couplings in the same colour as the collector: see p. 22

STANDARD DELIVERY

- Twine with BT connection
- Wall fixing set
- Concealed air vent G 1/2"
- Concealed drain cock G 1/2"

STANDARD COLOUR

- Collectors in polished stainless steel: code 012 or in Aluminium effect: code 016*
- Radiation tubes in all Jaga colours: gloss (series 2...) satin matt (series 3...) and special colours (series 0...)

TWINE PIANO OPENING ACT:

The first 'limited edition' at a standard price.

- Radiation tubes in alternating black 304 and white 333
- Collectors in polished stainless steel-look

Price: same as standard radiator with a polished stainless steel collector (code /012)

PRICES & OUTPUTS

code height length colour conn. collector
 ORDERING CODE: TWIW. 050 045. XXX /BT /012

H		L	033	045	057	063	069	081	099	117	135
050	75/65/20		---	512	---	---	---	921	1125	1330	1535
	55/45/20		---	262	---	---	---	471	575	680	785
	Stainless steel collector /012										
	Aluminium collector /016										
090	75/65/20		---	851	---	1191	---	1531	1871	2211	---
	55/45/20		---	435	---	609	---	783	957	1131	---
	Stainless steel collector /012										
	Aluminium collector /016										
180	75/65/20		1141	1556	1970	2178	2385	2800	---	---	---
	55/45/20		574	783	992	1096	1200	1409	---	---	---
	Stainless steel collector /012										
	Aluminium collector /016										
200	75/65/20		1206	1644	2082	2302	2521	2959	---	---	---
	55/45/20		606	826	1046	1157	1267	1487	---	---	---
	Stainless steel collector /012										
	Aluminium collector /016										


TWINE LR

VALVES, THERMOSTATIC HEAD AND LOCKSHIELDS INCLUDED AND FULLY INTEGRATED INTO THE DESIGN!

DIMENSIONS


TWIW_Twine /LR

Dimensions in cm

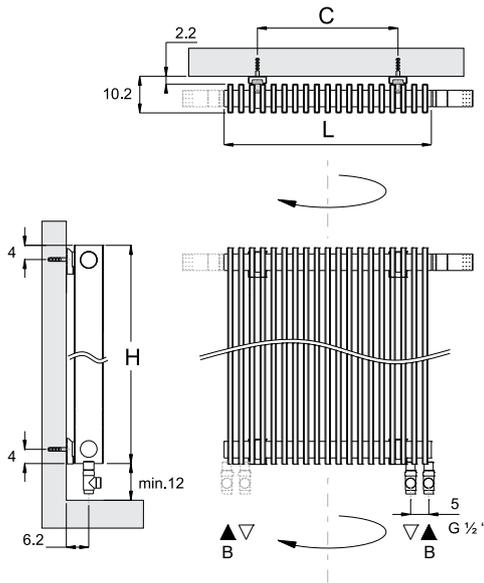

H	50/90		180/200	
	L	C*	L	C*
45.5	33	33.5	21	
63.5	51	45.5	33	
81.5	63	57.5	45	
99.5	81	69.5	51	
117.5	99	81.5	63	
135.5	117			

* C = -0 / +1




CONNECTION

LR Connection: appliance can be turned around to be connected L or R and comes with all necessary connection accessories.

LRW: Connection to the wall

LRF: Connection to the floor

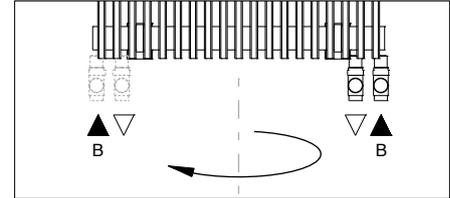

Caution: Flow always B!

To order sleeve couplings: see p. 22 (included in the price).

STANDARD DELIVERY

- Twine with LR connection below
- Assembled insert valve
- Design thermostatic head and lockshields in same finishing as the collector
- Sleeve coupling
- Wall fixing set
- Concealed air vent G 1/8"
- Concealed drain cock G 1/2"

STANDARD COLOUR

- Collectors in polished stainless steel: code 012 or in Aluminium effect: code 016*
- Radiation pipes in all Jaga colours: gloss (series 2...) satin matt (series 3...) and special colours (series 0...)

PRICES & OUTPUTS

code height length colour conn. collector
ORDERING CODE: TWIW. 050 045. XXX/LRW /012/...

Code sleeve coupling: see p. 22

H		L	033	045	057	063	069	081	099	117	135
050	75/65/20		---	512	---	---	---	921	1125	1330	1535
	55/45/20		---	262	---	---	---	471	575	680	785
	Stainless steel collector /012										
	Aluminium collector /016										
090	75/65/20		---	851	---	1191	---	1531	1871	2211	---
	55/45/20		---	435	---	609	---	783	957	1131	---
	Stainless steel collector /012										
	Aluminium collector /016										

Special series and 'multi-colour' versions: see www.theradiatorfactory.com

* The collector consists of steel injection rings. The stainless steel version has a high-quality stainless steel coating which is applied using the vapor deposit method. The aluminum version has a high-quality aluminum colour lacquer.




Output measured in accordance with EN442, at a water temperature of 75/65°C and a room temperature of 20°C (ΔT=50).

PINCH BT

DIMENSIONS

PINW_Pinch /BT

Dimensions in cm

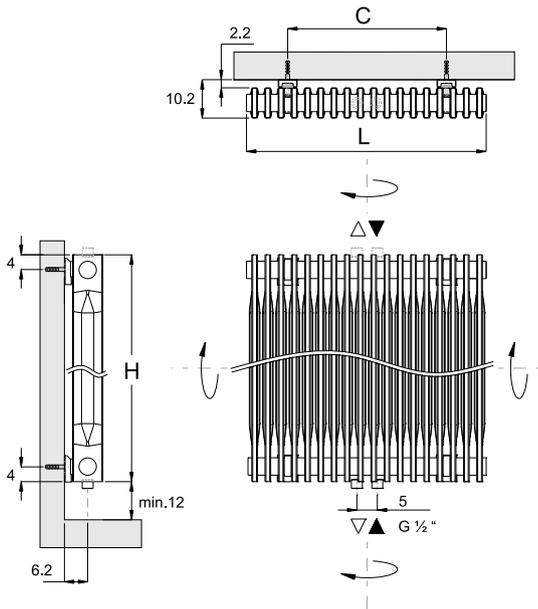


H	50/90		180/200	
	L	C*	L	C*
42	28	35	21	
63	49	42	28	
84	63	56	42	
105	84	70	49	
126	105	84	63	
147	126			

* C = -0 / +1

CONNECTION

Connection BT: central connection below or above.

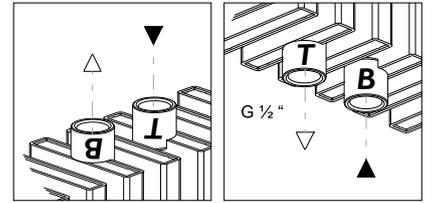

Caution:
 connection below: B = flow
 connection above: T = flow

Connection sets and sleeve couplings in the same colour as the collector: see p. 22

STANDARD DELIVERY

- Pinch with BT connection
- Wall fixing set
- Concealed air vent G 1/2"
- Concealed drain cock G 1/2"

STANDARD COLOUR

- Collectors in polished stainless steel: code 012 or in Aluminium effect: code 016*
- Radiation pipes in all Jaga colours: gloss (series 2...) satin matt (series 3...) and special colours (series 0...)

PRICES & OUTPUTS

code height length colour conn. collector
 ORDERING CODE: PINW. 050 042. XXX /BT /012

H		L	035	042	056	063	070	084	105	126	147
050	75/65/20	---	433	---	---	---	---	866	1083	1300	1516
	55/45/20	---	226	---	---	---	---	451	564	677	790
	Stainless steel collector /012										
	Aluminium collector /016										
090	75/65/20	---	706	---	1058	---	---	1411	1764	2117	---
	55/45/20	---	366	---	548	---	---	731	914	1097	---
	Stainless steel collector /012										
	Aluminium collector /016										
180	75/65/20	1091	1309	1746	1964	2182	2618	---	---	---	---
	55/45/20	571	685	914	1028	1142	1371	---	---	---	---
	Stainless steel collector /012										
	Aluminium collector /016										
200	75/65/20	1158	1390	1853	2084	2316	2779	---	---	---	---
	55/45/20	597	717	955	1074	1194	1433	---	---	---	---
	Stainless steel collector /012										
	Aluminium collector /016										


PINCH LR

VALVES, THERMOSTATIC HEAD AND LOCKSHIELDS INCLUDED AND FULLY INTEGRATED INTO THE DESIGN!

DIMENSIONS


PINW_Pinch /LR

Dimensions in cm

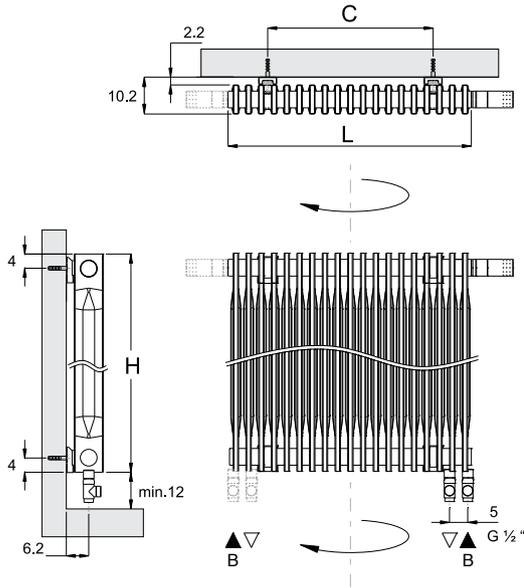

H	50/90		180/200	
L	C*	L	C*	
42	28	35	21	
63	49	42	28	
84	63	56	42	
105	84	70	49	
126	105	84	63	
147	126			

* C = -0 / +1




CONNECTION

LR Connection: appliance can be turned around to be connected L or R and comes with all necessary connection accessories.

LRW: Connection to the wall

LRF: Connection to the floor

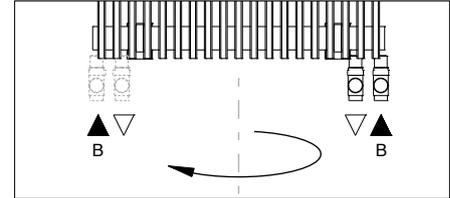

Caution: Flow always B!

To order sleeve couplings: see p. 22 (included in the price).

STANDARD DELIVERY

- Pinch with LR connection
- Assembled insert valve
- Design thermostatic head and lockshields in same finishing as the collector
- Sleeve coupling
- Wall fixing set
- Concealed air vent G 1/8"
- Concealed drain cock G 1/2"

STANDARD COLOUR

- Collectors in polished stainless steel: code 012 or in Aluminium effect: code 016*
- Radiation pipes in all Jaga colours: gloss (series 2...) satin matt (series 3...) and special colours (series 0...)

PRICES & OUTPUTS

code height length colour conn. collector
ORDERING CODE: PINW. 050 042. XXX/LRW /012/...

Code sleeve coupling: see p. 22

H	L	035	042	056	063	070	084	105	126	147
050	75/65/20	---	433	---	---	---	866	1083	1300	1516
	55/45/20	---	226	---	---	---	451	564	677	790
Stainless steel collector /012										
Aluminium collector /016										
090	75/65/20	---	706	---	1058	---	1411	1764	2117	---
	55/45/20	---	366	---	548	---	731	914	1097	---
Stainless steel collector /012										
Aluminium collector /016										

* The collector consists of steel injection rings. The stainless steel version has a high-quality stainless steel coating which is applied using the vapor deposit method. The aluminum version has a high-quality aluminum colour lacquer.



Output measured in accordance with EN442, at a water temperature of 75/65°C and a room temperature of 20°C (ΔT=50).

CONNECTION SETS

CONNECTION SETS WITH DANFOSS-PRO THERMOSTATIC VALVES FOR TWINE AND PINCH BT

for connection BT to the wall



set 47

TWO PIPE

CODE	fill in sleeve coupling
CODE.DW2.CD.1...	chrome
CODE.DW2.SD.1...	polished stainless steel version

POLISHED STAINLESS STEEL VERSION

CHROME

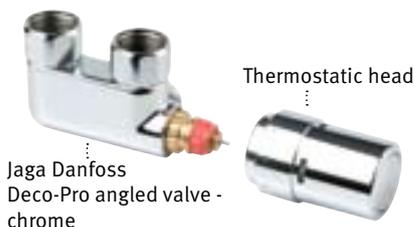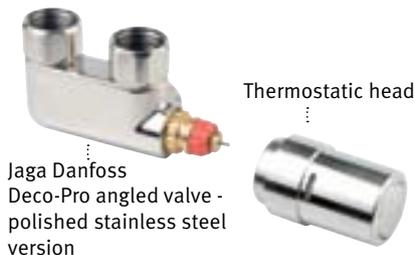

SLEEVE COUPLINGS



In chrome, stainless steel or aluminium effect, in accordance with the connection set ordered. Included in the price of the connection sets.

Flexible steel or copper

CODE	Tube Ø
110	10/1
112	12/1
114	14/1
115	15/1
116	16/1
118	18/1

Synthetic

CODE	Tube Ø
212	12/2
214	14/2
219	16/1.5
216	16/2
217	17/2
218	18/2

CONNECTION SETS WITH DECO-PRO THERMOSTATIC VALVES FOR TWINE AND PINCH BT

for connection BT to the wall

set 48

ONE PIPE AND TWO PIPE

CODE	fill in sleeve coupling
CODE.PW3.PS.1...	polished stainless steel version
CODE.PW3.PA.1...	aluminium

POLISHED STAINLESS STEEL VERSION

ALUMINIUM



RPE/ALU

CODE	Tube Ø
314	14/2
316	16/2
326	16/2.2
318	18/2

Steel tube for C.H.

CODE	Tube Ø
501	1/2"
504	3/8"

for connection BT to the floor

set 49

ONE PIPE AND TWO PIPE

CODE	fill in sleeve coupling
CODE.PF3.PS.1...	polished stainless steel version
CODE.PF3.PA.1...	aluminium












POLISHED STAINLESS STEEL VERSION

ALUMINIUM



















COLOUR CHART

Twine and Pinch are available in colours 201 to 233 (glossy), 301 to 333 (satin mat) and special colours.



Special colours



This colour chart is only indicative. It's impossible to obtain a 100% exact colour reproduction in printing. Metal slides with the different colours can be obtained on request.

All technical data and additional info, see <http://www.theradiatorfactory.com>.

